


## Industrial Keyboards | INOX Series | GPK-A343-OTB-DWP

### MODEL NO.: GPK-A343-OTB-DWP

**DESCRIPTION:** 71 keys (including 3 mouse buttons) compact format IP65 dynamic vandal proof stainless steel industrial keyboard with fully sealed and ruggedized industrial PCB electronics controller, and IP68 dynamic rated washable 38.0mm stainless steel optical trackball module with 800 DPI high resolutions for fast and accurate cursor position with extremely smooth operation without any noise, industrial PCB with carbon-on-gold key switch technology with long stroke ( $1.50 \pm 0.10$ mm) with extremely good tactile feeling for fast and accurate data input without any noise, 3 mouse buttons designed for right & left clicking and scrolling up and down with ball rolling, 3.0mm thickness brushed & oxidized aluminium back plate with water-tight gasket for easy and tightened sealing with cabinet or panel, rear panel mounting solution. FN + Clean combination keys to lock/disable the entire keyboard for easy cleaning and washing without needing to take away the keyboard from PC. Which is good for outdoor application with direct rain and very harsh environments with humidity, much dynamic water, oil, dirt, salt mist etc.

**DIMENSIONS:** 343.0mm x 105.0mm (front panel)

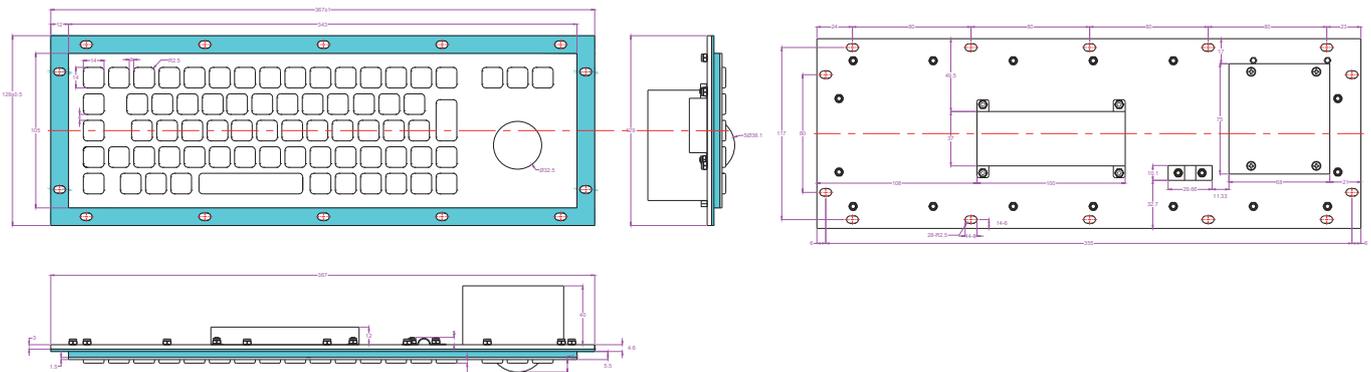

\* All technical data, specification and performance figures subject to change without notice.

## Industrial Keyboards | INOX Series | GPK-A343-OTB-DWP

### MAIN FEATURE

- The full keyboard can be locked/disabled via FN + Clean combination keys for easy cleaning without needing to take the keyboard away from PC.
- Imposing stainless steel design, specially designed keyboards meet the highest demands with regard to design, functionality, longevity and high protection level.
- Stainless steel fascia and key-tops guard willful destruction, vandal-proof, against corrosion, weather-proof especially under extreme climatic conditions, water proof/dirt proof, operation under hostile environments.
- Waterproof execution according to IP65 protection from top panel, rear aluminum plate with mounting holes easily & tightly mounting to enclosure or panel.
- An excellent tactile feel with full-long travel switches and allow users to achieve fast and accurate data input without any noise. With firm tactile perception for comfortable operation
- Internet friendly key layout, key-tops are laser-etched in legends and characters for easy readability, long life to prevent lettering rub-off.
- Metal keys are protected against twisting and levering which cannot be dislodged from front, or defaced removing key covers.
- Ease of customizing with multiple languages, to accommodate foreign or custom variants.
- Complete electronic modules including controller in close consultation with our customers are available.
- PS/2, USB connection plug and play with PC via PC existing OS driver, no needing of install separate driver.

<b>MECHANICAL DATA</b>	
Actuator/keys	71 keys (including 3 mouse buttons)
Key top style	Protuberant rectangular keys, laser engraved & etched legends & raised braille on keys are available
Key Size	14.0mm x 14.0mm for normal keys, 14.0mm x 28.0mm for enter key, 14.0mm x 70.0mm for space bar
Key travel	1.50±0.10mm
Actuation Force	1.5N±0.2N for key 14.0mm x 14.0mm (pressure point ), 2.5N±0.2N for key 14.0mm x 28.0mm (pressure point)
Front Plate	1.5mm thickness super quality brushed stainless steel
Back Plate	3.0mm thickness brushed & oxidized aluminium
Switch life	more than 5 million of operations
Tracker ball	38.0mm stainless steel optical trackball module, silver resin ball module optional
G.W.	2.00KGs
<b>ELECTRICAL DATA</b>	
Supply Voltage	+5V DC ± 5%
Current Rating	100mA
EMC Standard	EN 55032:2015 EN 55035:2017
Lifespan	> 5 years

\* All technical data, specification and performance figures subject to change without notice.

## Industrial Keyboards | INOX Series | GPK-A343-OTB-DWP

Switch Contact Material	Carbon-on-Gold key switch technology PCB
Interface	PS2, USB available
OS	All Windows, Linux, Unix, Mac OSX, Vxworks, Android, (U-cos--To be confirmed).
<b>ENVIRONMENTAL ADAPTABILITY</b>	
Operating temperature	-20°C to +65°C
Storage temperature	-30°C to +75°C
Operating RH	30-90%
Atmospheric pressure	60-106Kpa
Saline mist	96 hours, IEC 60512-6
Damp heat test at +40°C	21 days, IEC 60512-6
Dry heat test at +85°C	10 days, IEC 60512-6
<b>RELIABILITY</b>	
RoHS Compliant, CE and FCC, ESD	
Protection Level	IP65 dynamic (front panel)
Vandal resistant	IK08
Key Lifespan	>5 million actuations
MTBF	>20000H
MTTR	<30min
APPLICATIONS	Industrial, coal and mine, medical, bank kiosk and self service terminal, public access, explosion-proof automation, oil and gas etc.

\* All technical data, specification and performance figures subject to change without notice.