


Industrial Keyboards | INOX Series | GPK-B361TP-FN-DT-DWP

MODEL NO.: GPK-B361TP-FN-DT-DWP

DESCRIPTION: 85 keys compact format IP68 dynamic sealed and ruggedized vandal proof stainless steel industrial keyboard with IP65 dynamic sealed & ruggedized tough touchpad for fast and accurate cursor position, function keys F1, F2, F3...F10, F11, F12 are on the top line for easy operation, industrial metal dome PCB with gold-on-gold key switch technology with short stroke (0.45 ± 0.05 mm) with excellent tactile feeling for stable and accurate data input, movable stand alone DESK TOP VERSION, or mountable desktop with mounting holes on the bottoms for fixing. Which is good for outdoor application with direct rain and very harsh environments with humidity, much dynamic water, oil, dirt, salt mist etc, no rust risk and anti-salt spray corrosion.

DIMENSIONS: 361.0mm x 145.0mm x 21.5mm (L x W x H)

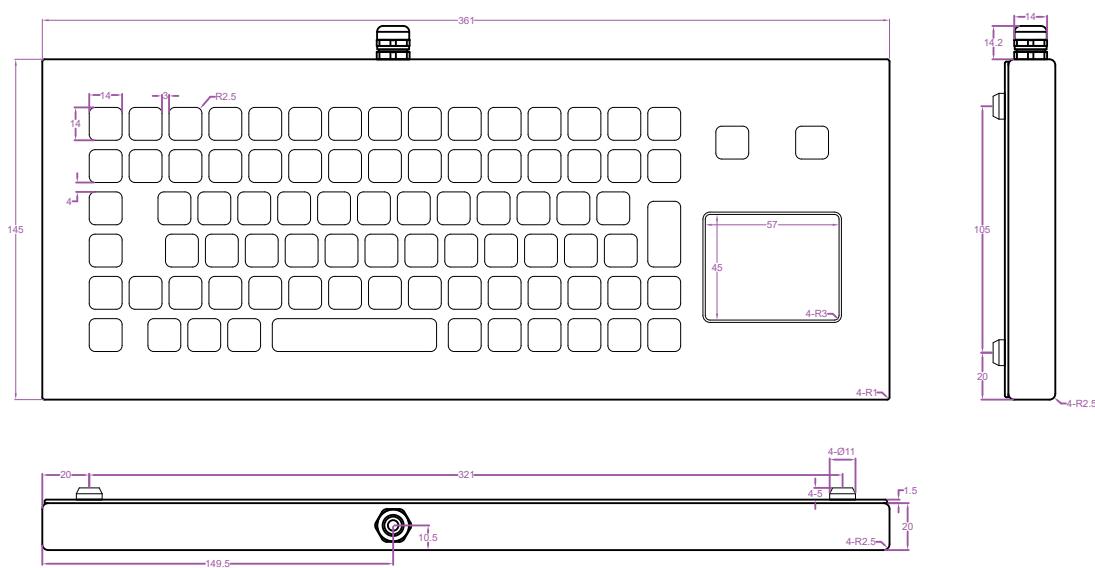

* All technical data, specification and performance figures subject to change without notice.

Industrial Keyboards | INOX Series | GPK-B361TP-FN-DT-DWP

MAIN FEATURE

- The full keyboard can be locked/disabled via FN + Clean combination keys for easy cleaning without needing to take the keyboard away from PC.
- Imposing stainless steel design, specially designed keyboards meet the highest demands with regard to design, functionality, longevity and high protection level.
- Stainless steel fascia and key-tops guard willful destruction, vandal-proof, against corrosion, weather-proof especially under extreme climatic conditions, water proof/dirt proof, operation under hostile environments.
- Waterproof execution according to IP68 protection from top panel.
- An excellent tactile feel with full-long travel switches and allow users to achieve fast and accurate data input without any noise. With firm tactile perception for comfortable operation
- Internet friendly key layout, key-tops are laser-etched in legends and characters for easy readability, long life to prevent lettering rub-off.
- Metal keys are protected against twisting and levering which can not be dislodged from front, or defaced removing key covers.
- Ease of customizing with multiple languages, to accommodate foreign or custom variants.
- Complete electronic modules including controller in close consultation with our customers are available.
- PS/2, USB connection plug and play with PC via PC existing OS driver, no needing of install separate driver.

MECHANICAL DATA	
Actuator/keys	85 keys(including 2 mouse buttons)
Key top style	Non-protuberant rectangular keys, laser engraved & etched legends on keys are available
Key Size	14.0mm x 14.0mm for normal keys, 14.0mm x 28.0mm for enter key, 14.0mm x 70.0mm for space bar
Key travel	0.45±0.05mm
Actuation Force	3.5N±0.2N for key 14.0mm x 14.0mm (pressure point), 7.0N±0.4N for key 14.0mm x 28.0mm (pressure point)
Front and Back Plate	Super quality brushed stainless steel
Switch life	more than 1 million of operations
Touch pad	sealed and ruggedized tough touchpad
Touchpad cover	Composite
More than Lifetime 10 million strokes	
Mutual capacitance sensing	
X/Y axis location detection resolution	40 Counts /mm
X/Y position report	relative
Output (self-detectable depending on cable)	PS2 or USB

* All technical data, specification and performance figures subject to change without notice.

Industrial Keyboards | INOX Series | GPK-B361TP-FN-DT-DWP

Tracking speed	Maximum 1,016 m/sec
Power supply voltage	5VDC ± 0.25V
Current rating (active mode)	< 10 mA
G.W.	2.50KGs
ELECTRICAL DATA	
Supply Voltage	DC +5V±5%
Current Rating	50mA
EMC Standard	EN 55032:2015 EN 55035:2017
Lifespan	> 5 years
Switch Contact Material	Gold-on-Gold key switch technology PCB
Interface	PS2, USB available
OS	All Windows, Linux, Unix, Mac OSX, Vxworks, Android, (U-cos--To be confirmed).
ENVIRONMENTAL ADAPTABILITY	
Operating temperature	-20°C to +65°C
Storage temperature	-30°C to +75°C
Operating RH	30-90%
Atmospheric pressure	60-106Kpa
Saline mist	96 hours, IEC 60512-6
Damp heat test at +40°C	21 days, IEC 60512-6
Dry heat test at +85°C	10 days, IEC 60512-6
RELIABILITY	
RoHS Compliant, CE and FCC, ESD	
Protection Level	IP68
Vandal resistant	IK09
Key Lifespan	>1 million actuations
MTBF	>20000H
MTTR	<30min
APPLICATION	Industrial, coal and mine, medical, bank kiosk and self service terminal, public access, explosion-proof automation, oil and gas etc.

* All technical data, specification and performance figures subject to change without notice.